


# JUNIPER®

## THIN Lamp with Desk Inset and Ground Control Installation Guide

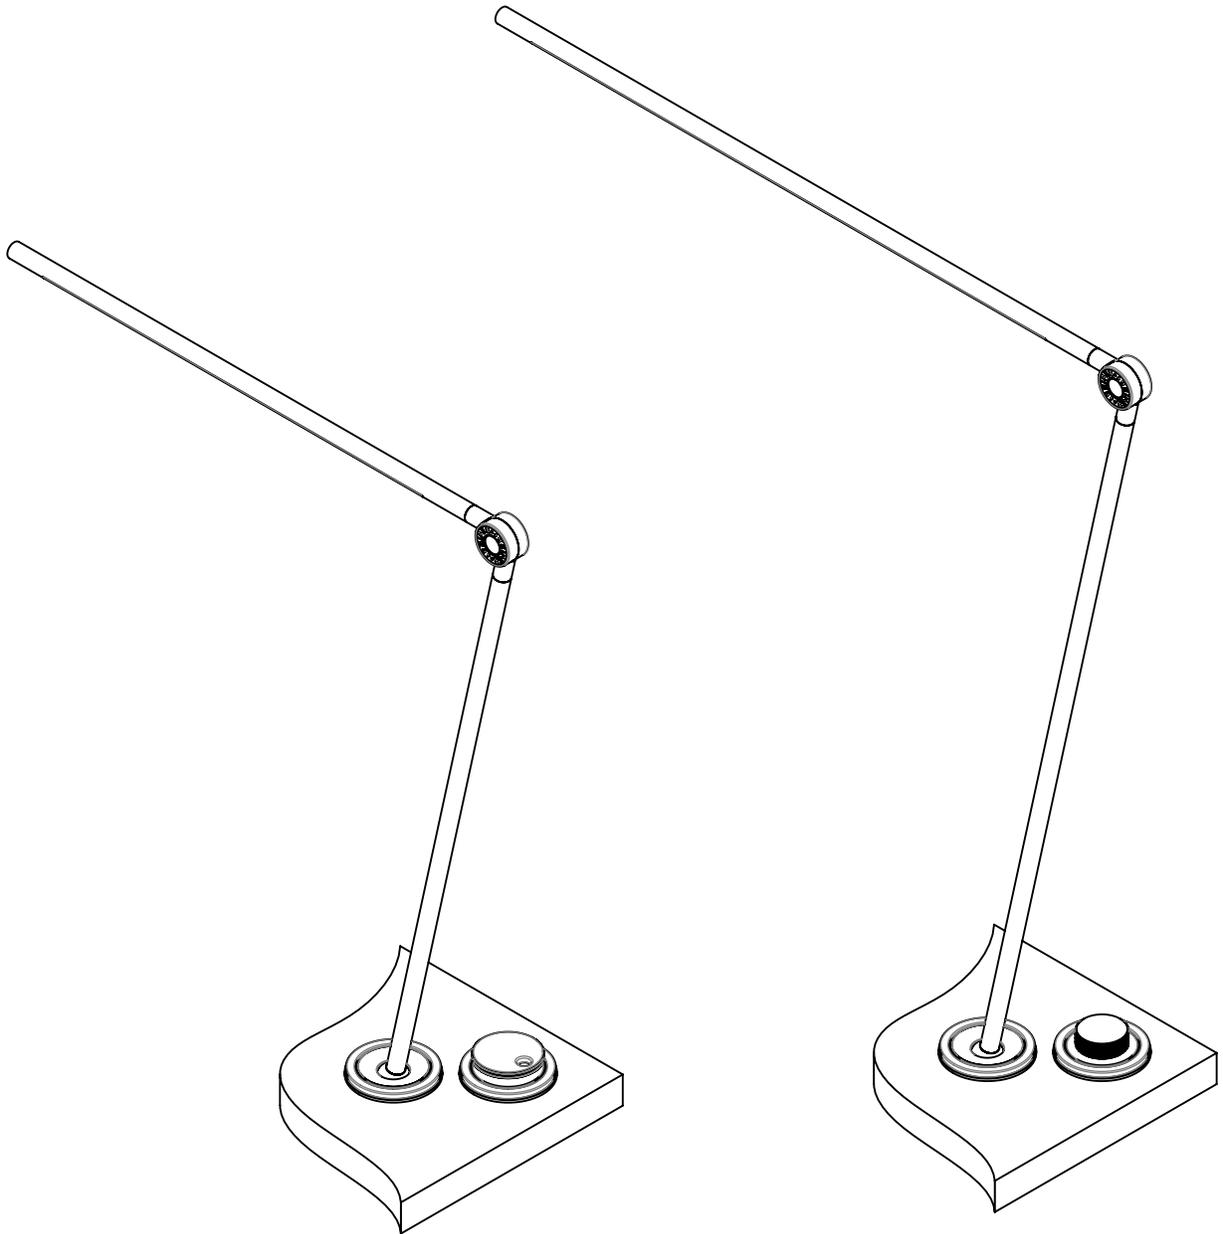

THIN Standard Lamp with  
desk inset & Ground Control

THIN Tall Lamp with desk  
inset & Ground Control

1

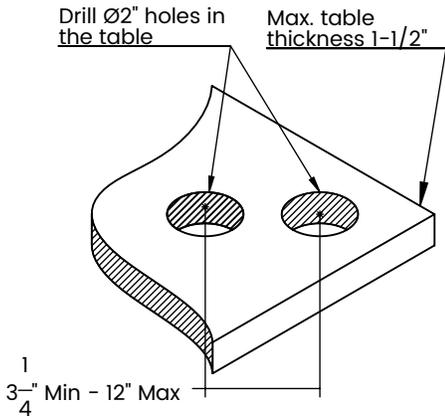


FIGURE 1

Drill Ø2" through holes, one for lamp and the other for ground control unit, in the table. **Thickness of the table should not exceed 1-1/2".** **Distance between the centers of the holes should be 3-1/4" minimum and 12" maximum.**

2

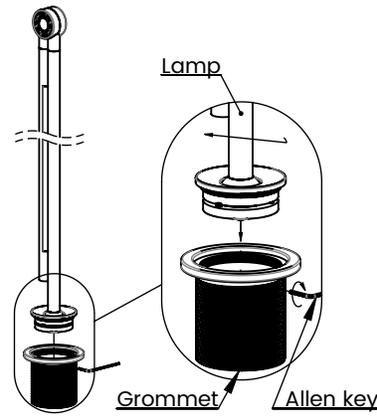


FIGURE 2

Screw the lamp into the grommet and use the provided Allen key to tighten the set screw and secure the lamp to the grommet. **Throughout the installation process, keep the lamp in a closed position as depicted above.**

3

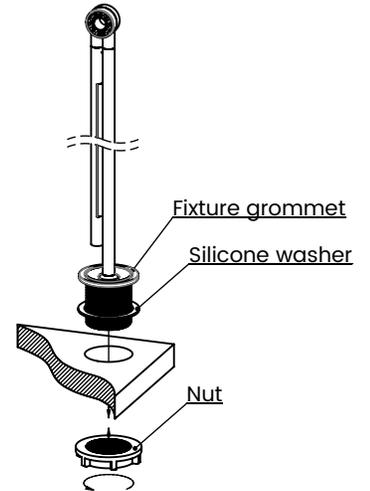


FIGURE 3

Slide the provided silicone washer on the fixture grommet. Place the fixture grommet in the hole and use the provided nut to secure the fixture.

4

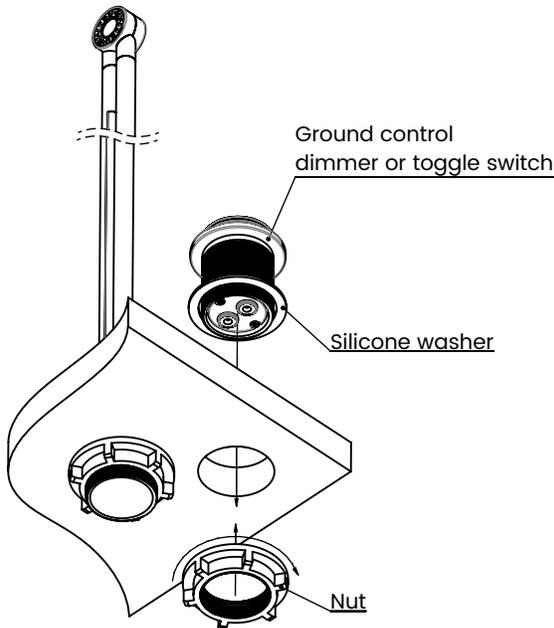


FIGURE 4

Slide the provided silicone washer on the dimmer/switch grommet in the second hole and use the provided nut to secure the fixture.

Place the ground control unit in the second hole and use the provided nut to secure the fixture.

5

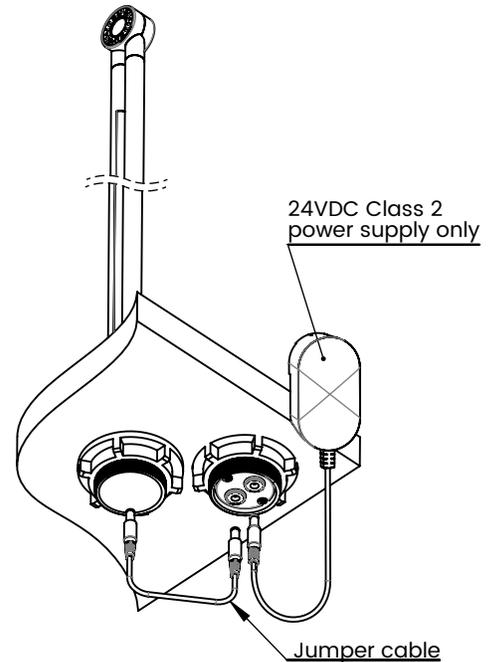


FIGURE 5

Connect the provided power supply to the 'POWER' port under the ground control unit. Connect one end of the provided jumper cable to the 'LED' port under the ground control unit.

6

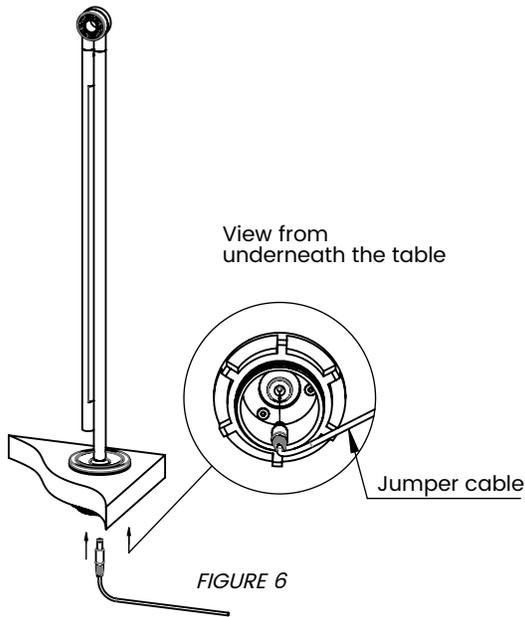


FIGURE 6

Connect the other end of the jumper cable to the lamp as shown.

7

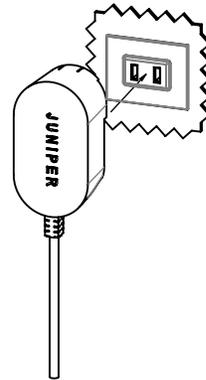


FIGURE 7

Plug the provided power supply in the wall socket to power the fixture.

**USING AND ADJUSTING THE LAMP**

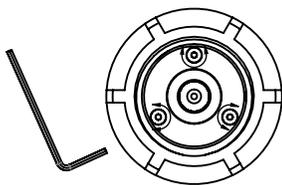


FIGURE 8

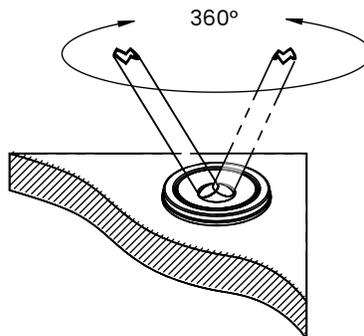


FIGURE 9

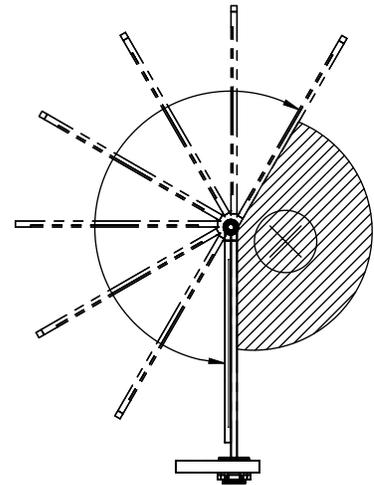


FIGURE 10

The lamp pivots around its central hinge and also rotates on its ball joint at the base of the lamp. **Be cautious not to force the lamp outside of its usable range.** The tension of the ball joint can be adjusted by tightening or loosening the three screws at the bottom of the lamp as shown in figure 8.

**CARE INSTRUCTIONS**

- Brass will patina over time like other natural metals and regular care is required in order to retain the quality finish of your fixture for years to come.
- Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.
- Do not use any chemical cleaning solution.
- Use indoors only.